

Project:	Type:
	Comments:



### Highlights

Indoor architectural pendant LED fixture

**LED:** Samsung LED chips, 2700-5000K, 80CRI (90 optional)

**Construction:** Transparent diffuser, Direct/Indirect Illumination, High grade aluminum extrusion, 4' and 8' sections, PC diffuser, integral driver. Power coat finish. Continuous linear runs available

Model #	Length	Wattage	Distribution	Lumen Output
TECHOLED-TP-DI-4-40	4'	40W	Direct/Indirect	4200Lm
TECHOLED-TP-DI-8-80	8'	80W	Direct/Indirect	8400Lm

Project:	Type:
	Comments:

### Configuration Example

Model #	Distribution	Length	Wattage	Color Temp.	Voltage	Finish
TECHOLED-TP-DI-4-40-27-U-S	Direct/Indirect	4'	40W/4'	2700K	110-277V	Silver

### Ordering Guide:

Select one option from each group below. For a custom preference please contact [sales@techoled.com](mailto:sales@techoled.com)

1-FIXTURE ID		2-DISTRIBUTION		3-LENGTH		4-WATTAGE	
--------------	--	----------------	--	----------	--	-----------	--

<b>TP</b>	Transparent Panel	<b>DI</b>	Direct/Indirect	<b>4</b>	4'	<b>40</b>	40W/4'
				<b>8</b>	8'	<b>80</b>	80W/8'

5-COLOR TEMP.		6-VOLTAGE		7-FINISH		8-MOUNTING	
---------------	--	-----------	--	----------	--	------------	--

<b>27</b>	2700K	<b>U</b>	110-277V	<b>S</b>	Silver	<b>PA</b>	Pendant (Aircraft Cable)
<b>30</b>	3000K	<b>HV</b>	347V	<b>W</b>	White		
<b>35</b>	3500K			<b>B</b>	Black		
<b>40</b>	4000K			<b>C</b>	Custom (RAL#)		
<b>50</b>	5000K						

9-DRIVER OPTIONS		10-OPTIONS		11-OPTIONS (CONT.)	
------------------	--	------------	--	--------------------	--

<b>DM</b>	0-10V Dimming	<b>M</b>	Motion Sensor (remote)	<b>EM</b>	EM Battery (remote)
<b>DM1%</b>	1% Dimming	<b>X</b>	None	<b>X</b>	None
<b>LT1</b>	LDE1 Lutron 1%				
<b>LT2</b>	DFC Lutron Vive RF				
<b>LT3</b>	FCJ Lutron ECO				
<b>LT4</b>	FCJ Lutron PowPak				
<b>LT5</b>	DFC Lutron Vive				
<b>BM</b>	BubblyNet BT Mesh				
<b>DA</b>	Dali				
<b>X</b>	None				

Project:	Type:
	Comments:

 **Driver Option Details**


Code	Description
LT1	<b>LDE1</b> -Lutron Hi-lume 1% EcoSystem, Soft-on, Fade-to Black Dimming
LT2	<b>RFJ/FCJS-010</b> - Lutron RF PowPak (0-10V)
LT3	<b>DFCSJ-OEM-RF</b> - Lutron Vive In-Fixture Control (RF only)
LT4	<b>DFCSJ-OEM-OCC</b> - Lutron Vive In-Fixture Control (with daylight sensors & occ/vac sensors)
LT5	<b>FCJ/FCJS-ECO</b> - Lutron Wireless PowPak (EcoSystem)
BM	Bluetooth Mesh Smart Wireless Control by BubblyNet

 **Color Temperature Details**

Code	Description
DT	<b>LDTTW</b> - Lutron Digital T-Series Tunable White


Project:	Type:
Comments:	

### Dimensions and Mounting

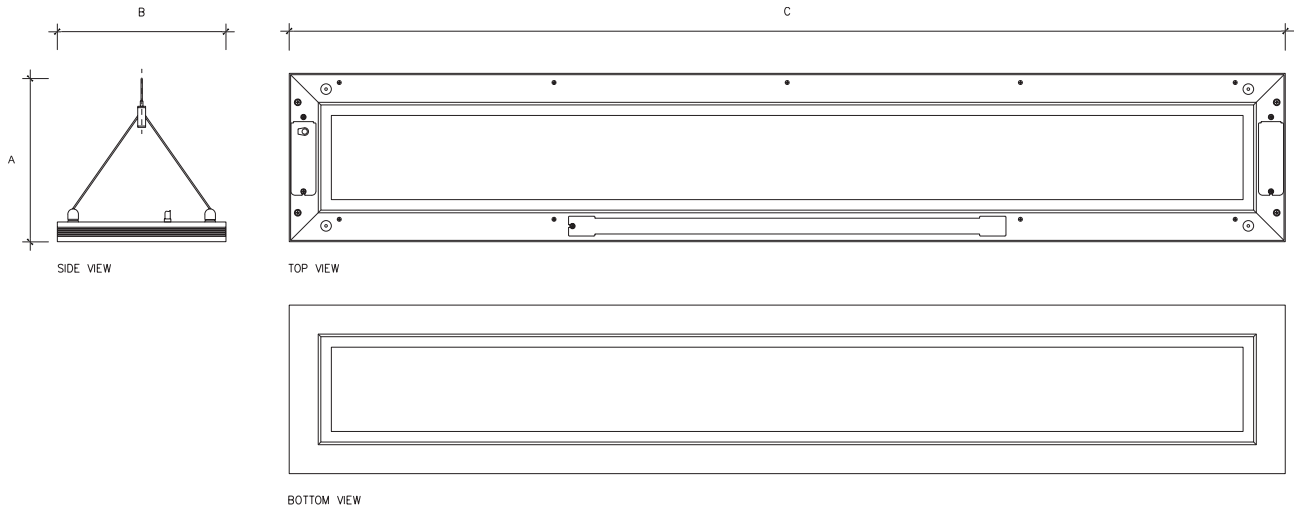

FIXTURE ID	A	B	C
TECHOLED-TP-DI-4-40	optional	7.87"	47.24"
TECHOLED-TP-DI-8-80	optional	7.87"	94.48"

### Distribution

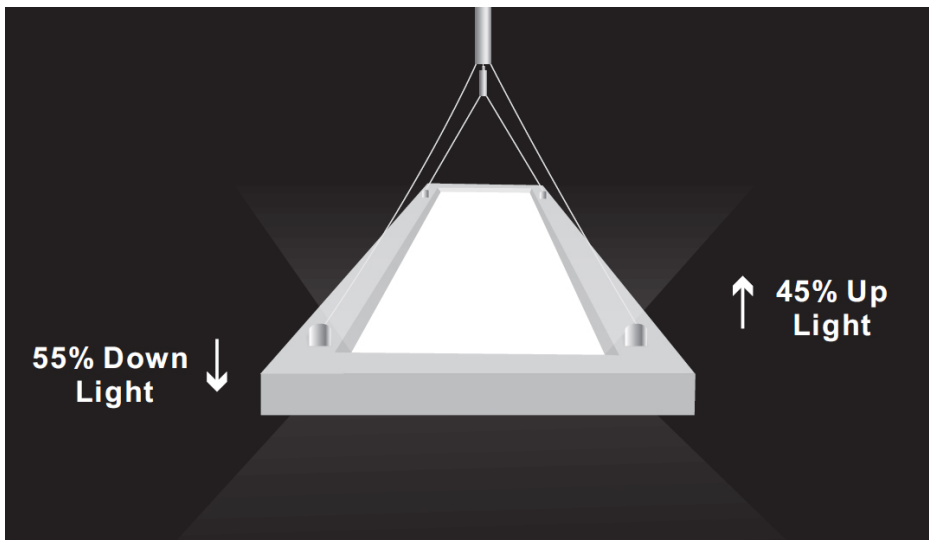


Project:	Type:
	Comments:

### Finish Details (powder coat finish)

#### ■ Standard Colors



#### ■ Custom Colors

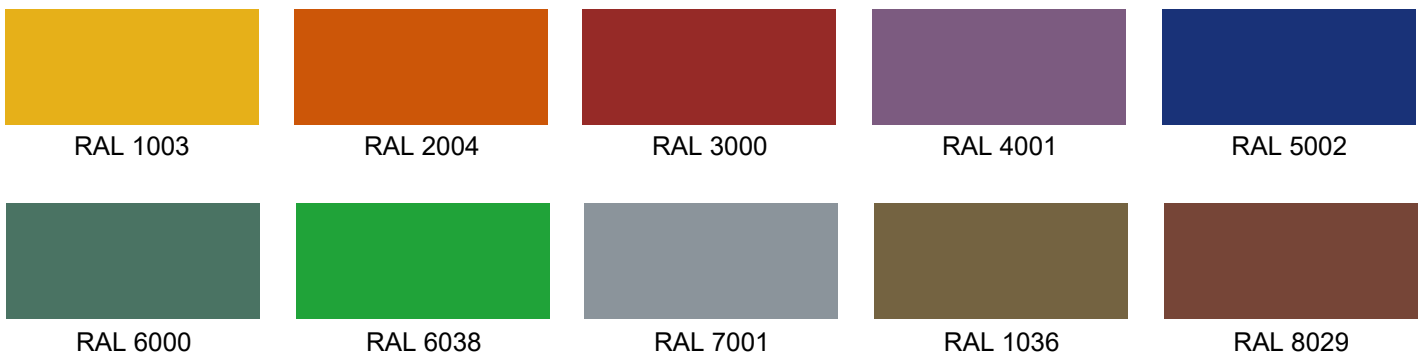

Any RAL color available, please refer to [ralcolorchart.com](http://ralcolorchart.com)

#### ■ Custom Wooden Colors

